

## Heavy duty nitrilo, puño abierto

### Descripción

Los guantes Nara Safe – HEAVY DUTY 100% nitrilo con forro interno de algodón y puño abierto son de uso industrial para la protección manual de las personas en los diferentes procesos, provee una capa con resistencia al rasgado conforme a la EN388; está fabricado en un material muy resistente de color azul sin costuras. Permite muy buena comodidad, confort, mejor ajuste, mayor destreza, estas especificaciones se traducen en una mayor productividad para el usuario y durabilidad para el elemento cuando se compara con otros guantes de protección general como los cueros.

### Composición

**Tejido:** algodón interno nitrilo alta densidad externo

**Longitud:** mm 250-260

### Características y usos

#### INFORMACIÓN GENERAL

Puño abierto sin costura forro interno algodón jersey, Palma y dorso cubierta en nitrilo 100%, para destreza y confort del usuario, de tipo multiuso. Ideal para metal metálica, Tienen un tejido de 360° sin costuras que permite que las manos estén protegidas. Gracias a su recubrimiento en nitrilo tenemos mayor agarre, precisión y protección en contacto de químicos e hidrocarburos en las labores a realizar. Recomendado para manipulaciones precisas. Resistente a la abrasión, permitiendo excelente motricidad fina y protección en presencia de hidrocarburos permite sumergir hasta la muñeca.

### Certificaciones y estándares

CE EN388 4221

### Propiedades físicas

Prueba	Nivel
ABRASIÓN	4
CORTE	2
RASGADO	2
PUNZADURA	1

CE EN388



4221

### Presentación

REFERENCIA	TALLA	CÓDIGO DE BARRAS
NS1300112	9	4897040901215
NS1300113	10	4897040900072

UNIDAD DE EMPAQUE	12 pares
CAJA MÁSTER	120 unidades
EMPAQUE INDIVIDUAL	Etiqueta de cartón
PESO	70 gr
LONGITUD	250mm - 260mm
COLOR	Azul con blanco

#### USOS

Mantenimiento automotriz motos y aeronáuticos  
Manejo de herramientas manual  
Operaciones técnicas de construcción  
Trabajos técnicos de mantenimiento industrial  
Operaciones logísticas  
Empaque y línea de producción  
Imprenta archivo y documentos  
Permite sumergir hasta la muñeca.





## Heavy duty nitrilo, puño abierto

### Tablas informativas

#### CE EN388 Protección mecánica

NIVEL DE ENSAYO	1	2	3	4	5
A. Resistencia a la abrasión (ciclos)	100	500	2000	8000	-----
B. Resistencia al corte (índice)	1.2	2.5	5.0	10.0	20.0
C. Resistencia al rasgado (newton)	10	25	50	75	-----
D. Resistencia a la punzadura (newton)	20	60	100	150	-----

#### Tallas y medidas

Referencia	S	M	L	XL
Tallas	7	8	9	10
Longitud en mm	230	240	250	260

## Heavy duty nitrilo, puño abierto / Certificaciones



In application of the Directive ref. 89/685/EEC of the 21<sup>st</sup> of December 1989, concerning the alignment of member state legislation relating to personal protective equipment and the decrees n° 92-765, 766 and 768 of 29<sup>th</sup> of July 1992 concerning the transposition of this Directive into French law,

### CTC

4, rue Hermann Frenkel - 69387 Cedex 07 - France  
Tel +33 (0)4 72 78 10 10 - Fax +33 (0)4 72 72 78 10 00 - E-Mail : ctclyon@ctcgroup.com - www.ctc.fr  
Comité Professionnel de Développement Cuir Chaussure Maroquinerie - Loi 78-954 du 22.08.1978 - Siret 77564972800160 - Code NAF 9412Z - TVA FR 88775649728

authorized by decree of the Ministry of Work, Employment and Health of the 20th of December 2010,

registered under the number 0075, published in OJEC, delivers :

**CE TYPE EXAMINATION CERTIFICATE**  
**0075/1182/162/01/12/0057 - EXT 01/06/12**

To the following model of personal protective equipment :

- \* protective glove against mechanical risks,
- \* reference of the model : N3204
- \* responsible for placing on the market :

Description of the protective glove, reference of technical rules verified in the context of the CE type examination and informations indicated on the product are detailed in the following pages of this certificate.

Drawn up in Lyon, on June 19th 2012

Issued by  Lionel GAUDILLERE



NOTA: Any modification to the terms of the personal protective equipment object of this CE type approval certificate or any modification of the information contained in the manufacturer technical file which served for the certification of the CE type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with law n° R. 4313 38 of the French Code of Work.

## Heavy duty nitrilo, puño abierto / Certificaciones



### 1. DESCRIPTION OF THE PROTECTIVE GLOVE

According to the technical file index : 01  
Reference : N3204  
Minor Variant of the model : N3203  
Dated : JUNE, 2012

Blue nitrile smooth Finish, Cotton jersey liner, 3/4 Coating, safety cuff Glove

**Available sizes :**

8    9    10    11

**Visual description :**



**Material :**

	Colour	Material	Gauges	Thikness
PALM	BLUE	NITRILE		
	WHITE	COTTON	36	
BACK	WHITE	COTTON	36	
LINING				
CUFF	WHITE	COTTON	36	
BINDING	BLUE	POLYESTER		



## Heavy duty nitrilo, puño abierto / Certificaciones



### 2. PROTECTION SCOPE

Compliance with the essential requirements of the Directive 89/686/EEC has been verified by using following technical rules:

- EN 420:2003+A1:2009 - General requirements for gloves and test methods
- EN 388:2003 - Protective glove against mechanical risks
- Directive 2002/61/CE : - This product fulfills the requirements given by the Directive.

References of test reports performed in order to verify the compliance with the requirements of the technical rules :

Laboratory	CTC Asia	CTC France	Other
EN 420	SH61836R1-11		SH61004-11, SH61649-11
Azo	SH61004-11		
EN 388	SH61836R1-11, SH60993R1-11		

Performance levels offered against mechanical risks (EN 388:2003) are:

Abrasion resistance	Blade cut resistance	Tear strength resistance	Puncture resistance
4	2	2	1

The levels of performance have been measured on the palm

## Heavy duty nitrilo, puño abierto / Certificaciones




### 3. MARKING

Each glove is clearly marked with the following information:

- \* Logo of the authorized representative:
- \* CE marking
- \* reference of the model: N3204
- \* size
- \* pictogram for mechanical risks followed by the performance levels
- \* information pictogram

Marking example:

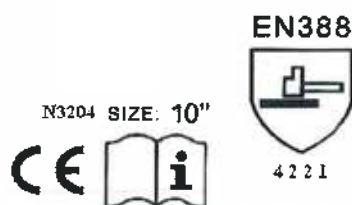



## Heavy duty nitrilo, puño abierto / Certificaciones

### MANUFACTURER'S TECHNICAL FILE

Reference of the product	:	N3204
Technical file index	:	01
Last update	:	JUNE, 2012



## Heavy duty nitrilo, puño abierto / Certificaciones

### IDENTIFICATION

Reference of the product :	:	N3204
Minor Variant of the model :	:	N3203
Technical file index :	:	01
Last update :	:	JUNE, 2012

**CE Type Examination Applicant :**

**Manufacturer :**

## Heavy duty nitrilo, puño abierto / Certificaciones

### GLOVE DESCRIPTION

**Glove description :**

Blue nitrile smooth Finish. Cotton jersey liner, 3/4 Coating, safety cuff Glove

**Visual description:**



**Available sizes :**

Minimum length of glove (mm)	Sizes
240	8
250	9
260	10
270	11

**Glove constitution :**

	Reference	Colour	Material	Surfacic mass	Gauges	Thikness
PALM		BLUE	NITRILE	50g/m2		
		WHITE	COTTON	500g/m2	36	
BACK		WHITE	COTTON	500g/m2	36	
LINING						
CUFF		WHITE	COTTON	500g/m2	36	
BINDING		BLUE	POLYESTER			



## Heavy duty nitrilo, puño abierto / Certificaciones

### PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protection Equipment Directive (89/686/CE).

This glove is designed for mechanical risks.

It is a category II product.

### GENERAL REQUIREMENTS

#### Standard EN 420 : 2003 + A1 : 2009

Dexterity : 5  
PH of glove and lining is greater than 3.5 and lower than 9.5 : yes  
Chromium VI lower than the detection limit : conform  
Size : conform

#### Directive 2002/61/CE :

This product fulfills the requirements given by the Directive 2002/61/CE (Azo dyes).

### SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

#### Mechanical hazard EN 388 : 2003

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	2
Tear strength resistance	2
Puncture resistance	1

## Heavy duty nitrilo, puño abierto / Certificaciones

### TEST REPORTS

Laboratory	CTC Asia	CTC France	Other
EN 420	SH61836R1-11		SH61004-11, SH61649-11
Azo	SH61004-11		
EN 388	SH61836R1-11, SH60993R1-11		

### MARKING - PACKAGING

#### Information printed on the glove :

Logo of the authorized representative :

Logo 

Glove's reference : N3204

Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

#### Marking example :



#### Method of marking on the glove :

PRINTING ON THE BACK OF GLOVE

#### Packaging :

1 PAIR/ BAG, 12 PAIRS/POLYBAG; 240 PAIRS/CARTON



## Heavy duty nitrilo, puño abierto / Certificaciones

### INSTRUCTION FOR USE

Glove reference : N3204

Available sizes : 8 9 10 11

#### **Glove description :**

Blue nitrile smooth Finish, Cotton jersey liner, 3/4 Coating, safety cuff Glove

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the Directive 89/686/CEE innocuousness, comfort, solidity.

It has been subject to a CE type Examination performed by :

C.T.C. (0075)  
4, rue Hermann Frenkel  
69367 LYON Cedex 07  
FRANCE

#### **Applicable standards :**


The glove meets the requirements of the standard EN 420 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :



#### Application :

Mechanical hazard - EN 388



4221

Levels of performance

Abrasion resistance	4
Blade cut resistance	2
Tear resistance	2
Puncture resistance	1

#### **Protection limit :**

The protection against risks or hazards which are not mentioned in this document is not warranted. The levels of performance mentioned are only valid for the palm of the glove. The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated. These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

#### **Storage and cleaning notice**

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.